

Composites Test Fixtures | Strain Gauge Adapters

From aerospace to construction, strain gauges are used in a variety of industries to measure strain in both materials and structural testing. These strain gauge adapters allow a single strain gauge to be used with any standard Instron® strain channel.

Features and Benefits

- Simple to use
- Accurate readings
- Synchronous data acquisition with Instron electronics
- T-Slot mounting


Related Products

- Strain Conditioner Cards

Principle of Operation

The strain gauge adapter contains bridge completion resistors and electrical calibration circuitry.

The strain gauge leads are connected to the adapter via a spring-loaded terminal. Both 2 and 3 wire strain gauge connections are supported. The adapter is compatible with strain gauges that have gauge factors between 1.5 - 2.5.

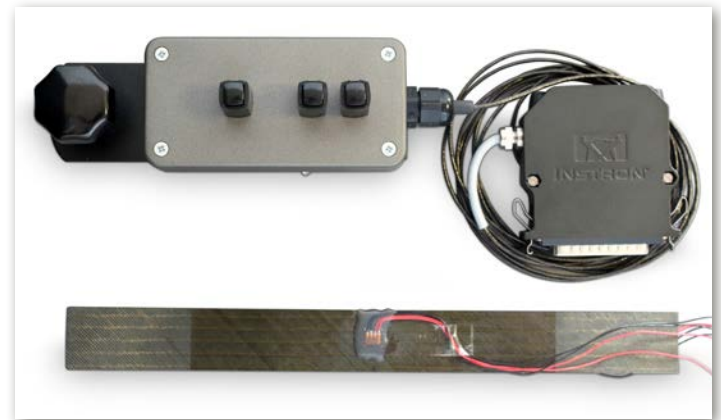

Multiple strain gauges require multiple adapters, which can be used up to the maximum number of strain channels fitted to the testing machine (includes Expansion channels on 5900 systems).¹

It is recommended that the adapter is used with Instron Bluehill® 3 Software.

Notes:

1. The adapter is not compatible with 5500 Versa Channel

Specifications

		2210-891	2210-892
Gauge Resistance	ohm	120	350
Gauge Factor	—	1.5 to 2.5	
Full Scale Strain	—	50,000 µε / 5%	
Linearity (Strain <1% / 10,000 µε)	—	Better than 1% of Reading or 0.01% of Full Scale*	
Linearity (Strain <5% / 50,000 µε)	—	Better than 3% of Reading or 0.01% of Full Scale*	
Strain Gauge Connections	—	Spring-Loaded Terminals	
Controller Connection	—	Instron Standard 25-Way Connector	
Cable Length	m	2	
Size (not including terminals)	mm	100 × 50 × 25	
	in	4 × 2 × 1	

* Whichever is greater

www.instron.com